



# RF1395POS


## POS



The RF1395POS is an essential POS hardware solution for the retail and hospitality industries. A 15" AIO full-functional POS solution that offers. True-Flat resistive touch technology, rich I/O ports, low power consumption, easy connectivity to all types of POS peripherals, optimal system performance capability and highly customizable features.

### ★ FEATURES

- 15" True-Flat Resistive Touch
- Intel Bay Trail or Skylake U Processor
- Fanless and Silent
- Easy Swap HDD
- 3-Track MSR Available
- iButton Available
- 2nd Display and Customer Display Available

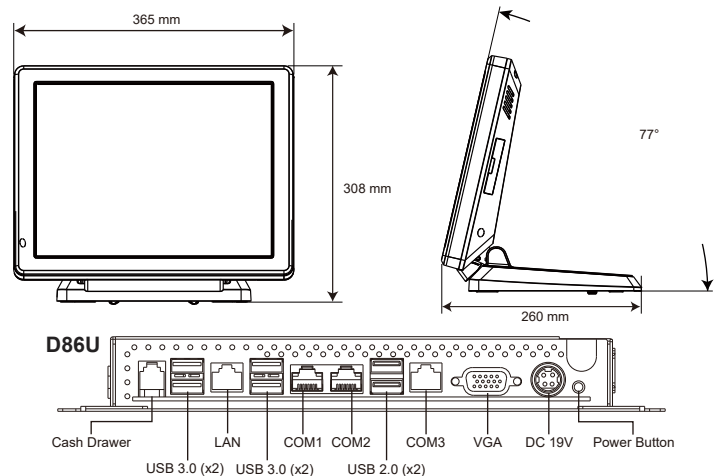



# RF1395POS

Pos All In One



## SPECIFICATION

<b>Motherboard</b>	<b>Type</b>	D36
	<b>Processor</b>	Intel Bay Trail CPU Celeron J1900 2.4GHz
	<b>Chipset</b>	CPU Integrated
	<b>System Memory</b>	1x DDR3L SO-DIMM up to 8G, 1333MHz
<b>LCD Touch Panel</b>	<b>Graphic Engine</b>	Intel HD graphic DX11 and OCL1.1
	<b>LCD Size</b>	15" LED LCD
	<b>Brightness</b>	300 nits
	<b>Resolution</b>	1024 x 768
	<b>Touch Screen</b>	True-Flat Resistive Touch
<b>Storage Device</b>	<b>Tilt Adjustment</b>	10° ~ 77°
	<b>Hard Drive</b>	1x 2.5" Slim SATA HDD
	<b>Flash Memory</b>	SATA SSD Flash Card (Option)
<b>Expansion</b>	<b>Mini PCI-E Socket</b>	1
<b>External I/O Ports</b>	<b>USB</b>	1x USB3.0/2.0, 4x USB2.0
	<b>Serial Port</b>	3x RJ45 (powered RS232) (default 0V, COM1, COM2 0V/5V; COM3 0V/12V)
	<b>LAN</b>	1x RJ45
	<b>Cash Drawer</b>	1x RJ11
	<b>VGA</b>	1x DB15
	<b>DC Jack</b>	1x 4 pin w/ lock
	<b>Power Switch</b>	1
<b>Power</b>	<b>Power Adapter</b>	65W / 19V
<b>Peripheral (Option)</b>	<b>MSR</b>	3-Track MSR (USB)
	<b>iButton</b>	iButton (USB)
	<b>2nd Display</b>	15" without touch
	<b>Customer Display</b>	LCM display 2 x 20 characters (USB)
<b>Certificate</b>	<b>EMC &amp; Safety</b>	FCC Class A, CE Mark, LVD
<b>Environment</b>	<b>Operating Temperature</b>	0°C ~ 35°C (32°F ~ 95°F)
	<b>Storage Temperature</b>	-20°C ~ 60°C (-4°F ~ 140°F)
	<b>Humidity</b>	20% ~ 85% RH non-condensing
<b>Dimension (WxDxH)</b>		370 x 220 x 298 mm (14.6" x 8.7" x 11.7")
<b>Weight</b>		7.5 kg (16.5 lbs)
<b>OS Supported</b>		Windows 7, POSReady 7, Windows Embedded 8.1 Industry, Windows 10 IoT Enterprise, Linux

\*Product specifications subject to change without prior notice